


NETWORKING ESSENTIALS





What is a network?

- A network is a group of computers that are wired together in some fashion which enables sharing of information and services

Required network elements



?

- At least two individuals who have some thing to share : - (Network Services)
- A method or pathway for connecting each other : - (Transmission Media)
- Rules so that two or more individuals can communicate : - (Protocols)



Network Services

- The capabilities that networked computers share. These are provided by numerous combinations of computer hardware and software



Two types of networks

- Peer – to – peer : – Allow any entity to both request and provide network services
- Server – centric : – Places restrictions upon which entity may make requests or service them



Transmission Media

- The pathway networked entities use to contact each other
- Includes cable and wireless technologies



Protocols

- Rules required to help entities communicate or understand each other
- When both entities formally agree to use a common language , there established a successful communication protocol



NETWORK SERVICES

- File Services
- Print Services
- Message Services
- Application Services
- Database Services



File Services

- Includes network apps designed to efficiently store, retrieve or move data files. Its main functions are
 - ❖ File transfer
 - ❖ File storage and data migration
 - ❖ File update synchronization
 - ❖ File archiving



Print services

- Are network apps that control and manage access to printers and fax equipment. Its functions are,
 - ❖ Provide multiple access from limited interfaces
 - ❖ Eliminate distance constraints
 - ❖ Handle simultaneous requests and queue those requests
 - ❖ Share specialized equipment



Message services

- Include storing, accessing and delivering text, binary, graphic, digitized video and audio data. Its functions are,
 - ❖ Electronic mail
 - ❖ Integrated electronic mail and voice mail
 - ❖ Object-oriented applications
 - ❖ Workgroup applications




Application services

- Are network services that run software for network clients. Its functions are,
 - ❖ Specialization of servers
 - ❖ Scalability and growth



Database Services

- Provides server-based database storage & retrieval that allow network clients to control data manipulation and presentation. They provide
 - ❖ Data security
 - ❖ Co-ordination of distributed data
 - ❖ Replication



- Cable Media : – using wires or fibers that conduct electricity or light
 - Twisted pair cable
 - Co-axial cable
 - Fiber-optic cable
- Wireless media : –typically uses higher electromagnetic frequencies



Twisted Pair Cable

- Uses twisted copper wires of 22–26 gauge
- Two types : –
 - Unshielded Twisted Pair
 - Shielded Twisted Pair



Unshielded Twisted Pair (UTP)

- Composed of a set of twisted pairs with a simple plastic encasement.
- Uses RJ 45 connector
- Follows EIA's cable category standards i.e. CAT 1- CAT5




- Features : -

- Cost : - extremely low
- Ease of installation and reconfiguration
- Capacity - 1-100MBps
- Attenuation - affects if the length is more than a 100 meters
- EMI - the copper cable used is prone to EMI



Shielded Twisted Pair

- Insulated cable which includes bundled pairs wrapped in a foil shielding
- Extensively used by Apple and IBM in proprietary networks
- Features : –
 - Cost – moderately expensive
 - Installation – difficult




- More bandwidth efficient and can use higher frequencies
- Up to 500MBps at 100m (common is 16MBps)
- Attenuation – similar to UTP
- EMI – very less due to shielding



Co-axial cable

- Is made of two conductors that share a common axis
- 4 types : –
 - 50 Ohm RG-8 7 RG-11 (used in thick Ethernet)
 - 50 Ohm RG-58 (Used in thin Ethernet)
 - 75 Ohm RG-59 (Used for cable TV)
 - 93 Ohm RG-63 (Used for ARC net)




- Features : –
 - Cost – approx: same as UTP
 - Installation – simple
 - Bandwidth – only used in networks with 10MBps or less
 - EMI – resists better than TP cables



Fiber Optic Cable

- Made of a light conducting glass or plastic core surrounded by cladding and a tough outer sheath
- Single mode : – allows only one light path
- Multi mode : – allows various paths



- Common types : –

- 8.3micron core/125micron cladding (single)
- 62.5microncore/125 micron cladding (multi)
- 50micron core/125 micron cladding (multi)
- 100micron core/140micron cladding (multi)

- Features : –

- Cost – relatively expensive
- Installation – difficult
- Bandwidth–very high 100MBps to >2GBps
- Attenuation – very low
- Interference – more immune



Wireless media

- Transmits and receives signals without an electrical or optical conductor
- Common 3 types
 - Radio wave
 - Microwave
 - Infrared light



Radio Frequency

- Resides between 10KHz to 1 GHz
- Can be broadcast omni directionally , or fine tuned for directional emissions from a variety of transmitting antennas
- Low attenuation
- Stations can be mobile or stationary

Microwave



Exists in two forms

- Terrestrial systems (earth based) – uses directional parabolic antennas. Operates in 4–6 or 21–23 GHz range, expensive, high bandwidth etc
- Satellite systems – Uses directional parabolic antennas located on earth and geosynchronous orbiting satellites .11–14 GHz, expensive, prone to atmospheric interference.

Infrared

- Most useful in small or open indoor environments
- Not capable of penetrating walls or other opaque objects
- Operates in 100GHz to 1,000 THz
- Two categories
 - Point-to-point – directed at specific targets
 - Broadcast – relaxes the focus to a wide area

Network Connectivity Hardware




- Repeaters
- Hubs
- Bridges
- Multiplexers




Repeater

- Is an amplification device used to increase the medium's max: effective distance
- Two types
 - Amplifier : – amplifies all incoming signals including undesirable noise (simple,fast)
 - Signal regenerating repeater : – strips data out of the signal, reconstructs and retransmits the signal (complex,time consuming)



Hubs

- Provides a central point of connection between media segments are called hubs, multiport repeaters or concentrators
- Three types
 - Passive
 - Active
 - intelligent

- 
- Passive Hub : - Connects medium segments together , no signal regeneration is performed
 - Active Hub : - Like passive one but it regenerates or amplifies signals
 - Intelligent Hubs : -In addition to signal regeneration and network management, it provides intelligent path selection, and can choose different paths for delivery



Bridge

- Extends the max: distance by connecting separate segments together.
- Selectively pass signals from one medium segment to another
- Used to minimize network traffic




Multiplexers

- Are used to combine two or more separate signals on single transmission media segment to make full use of the transmission media

Internetwork Connectivity Hardware



- Used to connect 2 individual networks without losing their separate identities
 - Routers
 - Brouters
 - CSU/DSU

- 
- Routers : - Connect two or more logically separate networks (or sub networks)
 - Brouters : - are routers which performs also as bridges
 - Channel Service Unit/Digital Service Unit : - are devices that prepare electric pulse signals for transmission on WAN transmission media; protects from electrical noise and unsafe electric voltages


Physical layer addresses the following : -

- Connection types : -Point to Point or multipoint
- Physical topology : -Bus, Star, Ring, Mesh, Cellular
- Signaling : - Digital, Analog
- Bit Synchronization : - Sync, Asynchronous
- Bandwidth usage: - Broadband, Base band
- Multiplexing: -TDM, FDM, Stat TDM




Physical Topology



- Is the complete physical structure of the transmission media
- Things to be taken care during choosing a topology
 - Ease of installation
 - Ease of reconfiguration
 - Ease of troubleshooting
 - Number of units affected by media failure

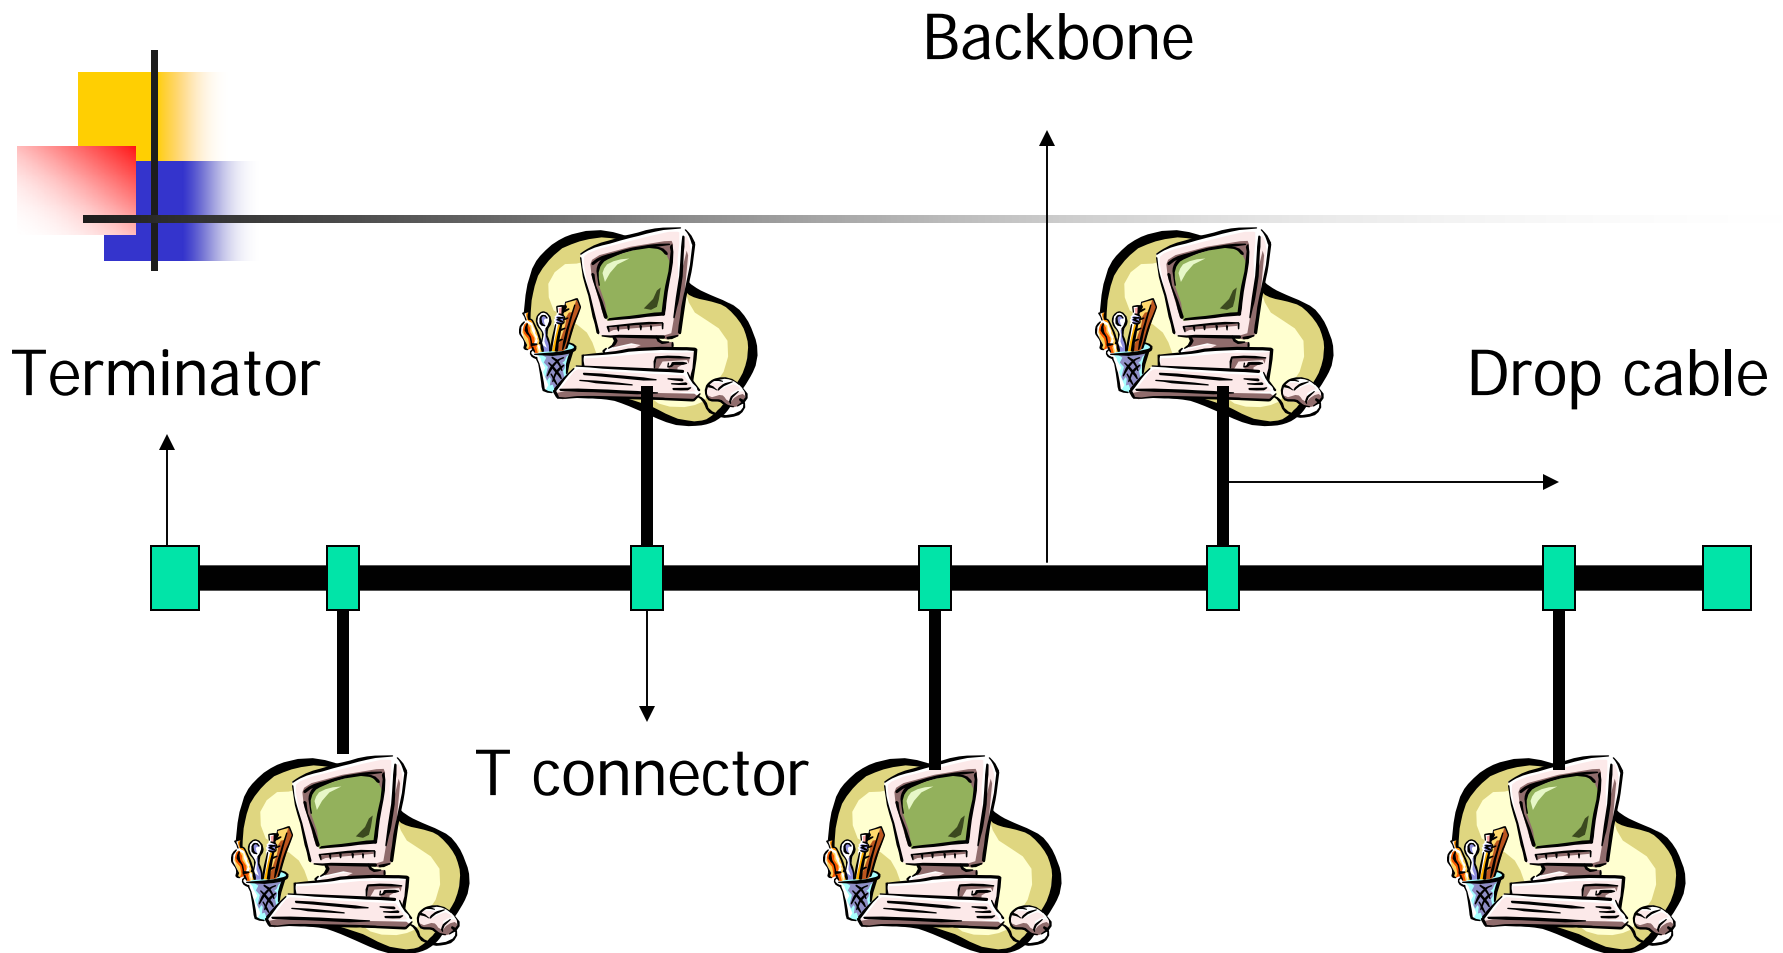

Bus Topology

Bus Topology – features


- 
- Uses a long cable called Backbone
 - Short cables called Drop cables can be attached to backbone to connect nodes
 - Backbone is terminated at both ends
 - Relatively easy to install
 - Requires less media than others
 - Difficult to troubleshoot
 - All units affected by media failure
 - Difficult to reconfigure

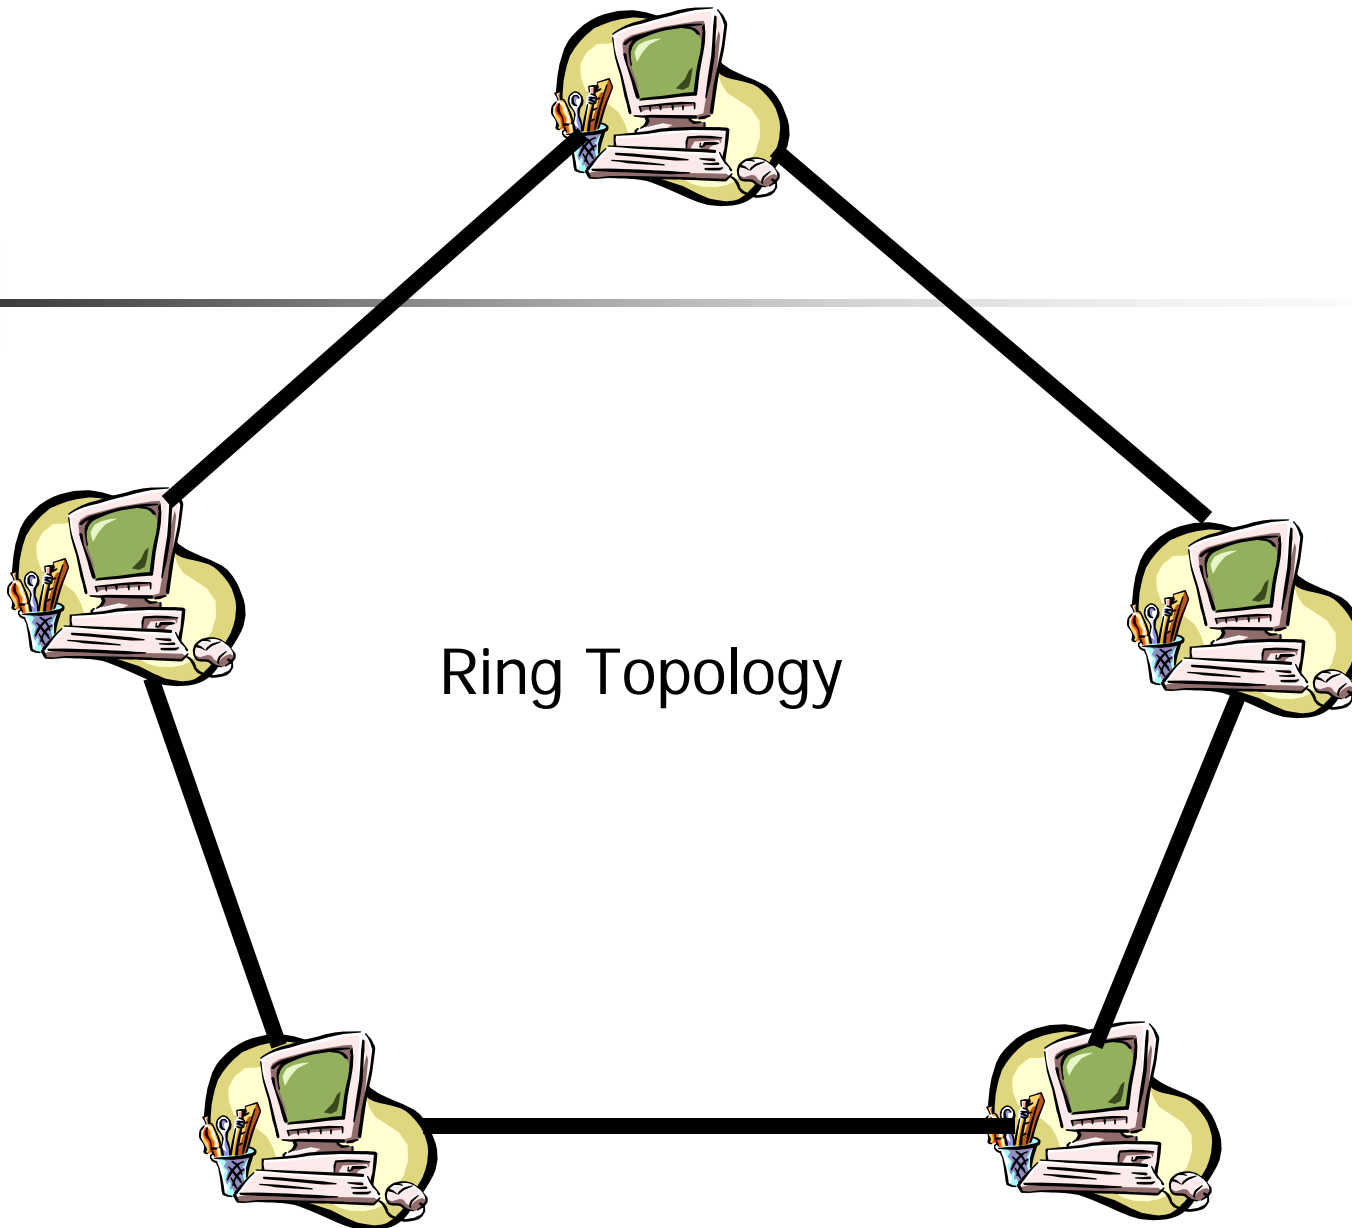




Ring Topology – features


- Is a circular, closed loop topology
- Signals are regenerated at each node ; so minimal degradation
- Cable faults can easily be identified
- More difficult to install and reconfigure
- Media failure can cause complete network failure in uni-directional rings

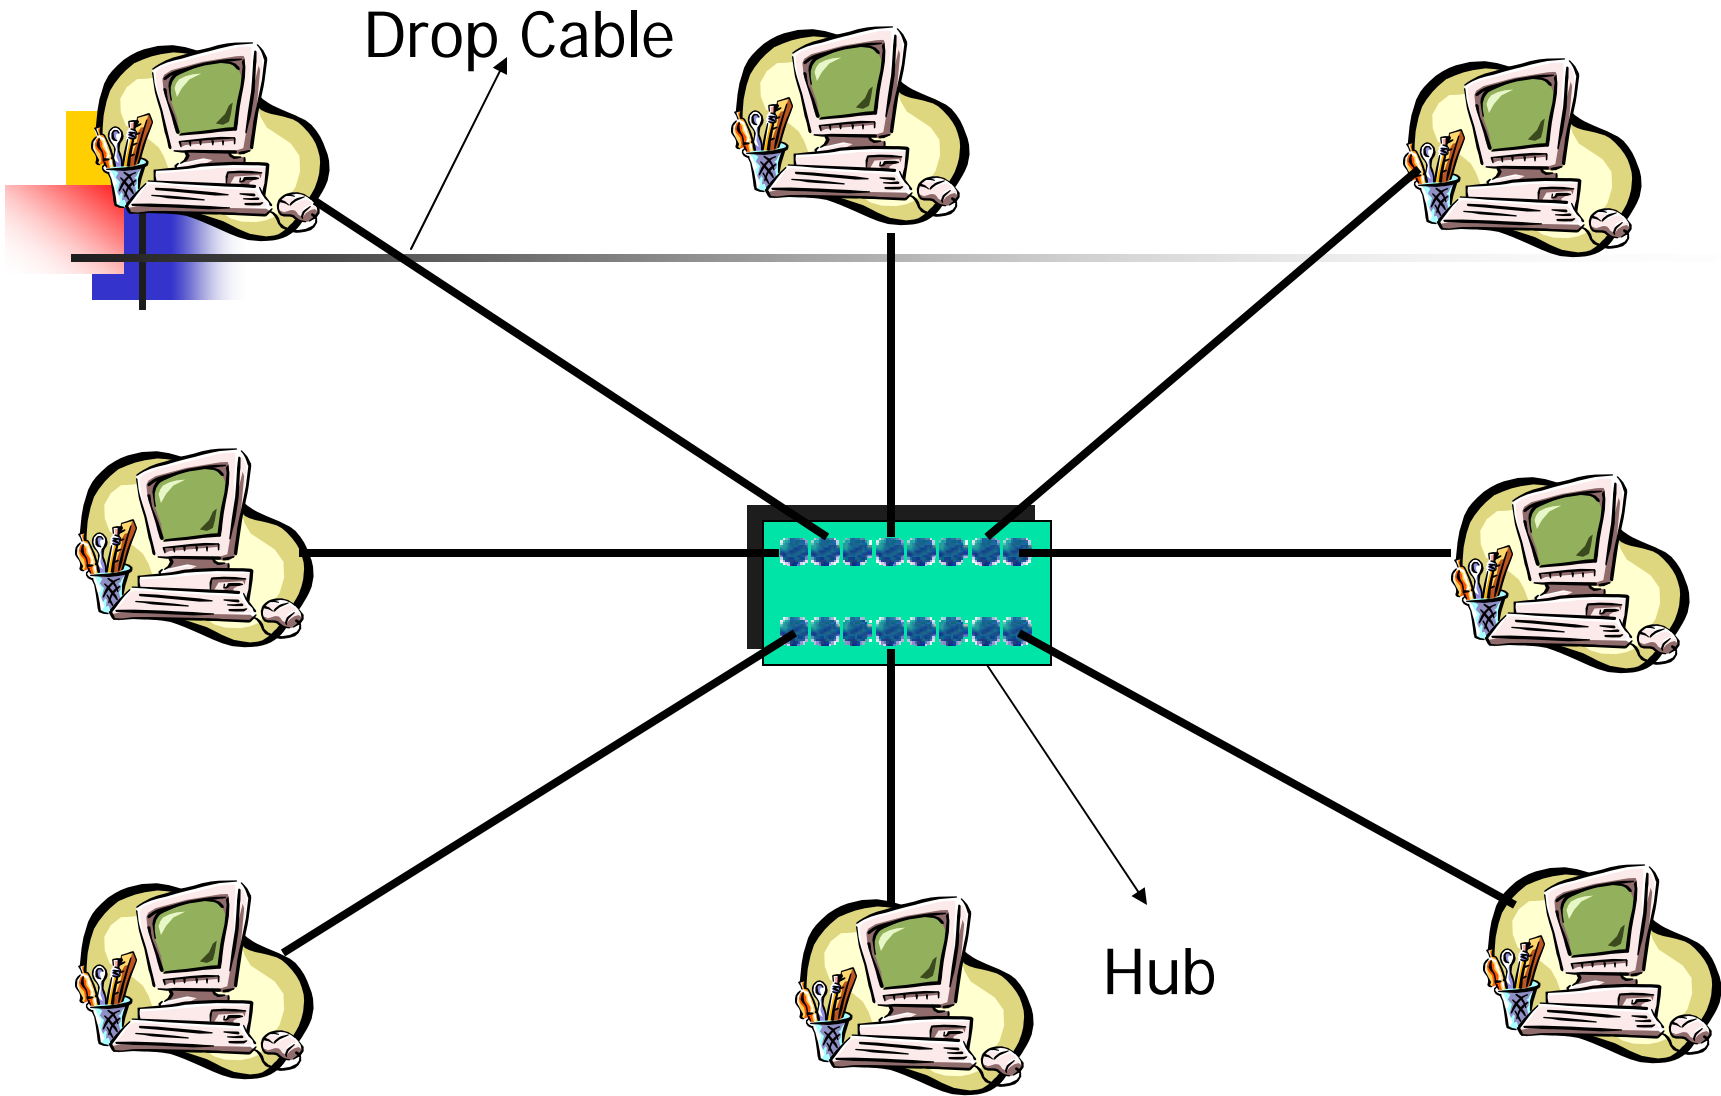

Star Topology


Star Topology


- 
- Uses a central device with drop cables extending in all directions
 - Star topologies can be nested within other stars
 - Each device is connected via a point to point link to the central device
 - Easy to reconfigure, troubleshoot
 - Requires more cable than others
 - Media faults will not affect another segment

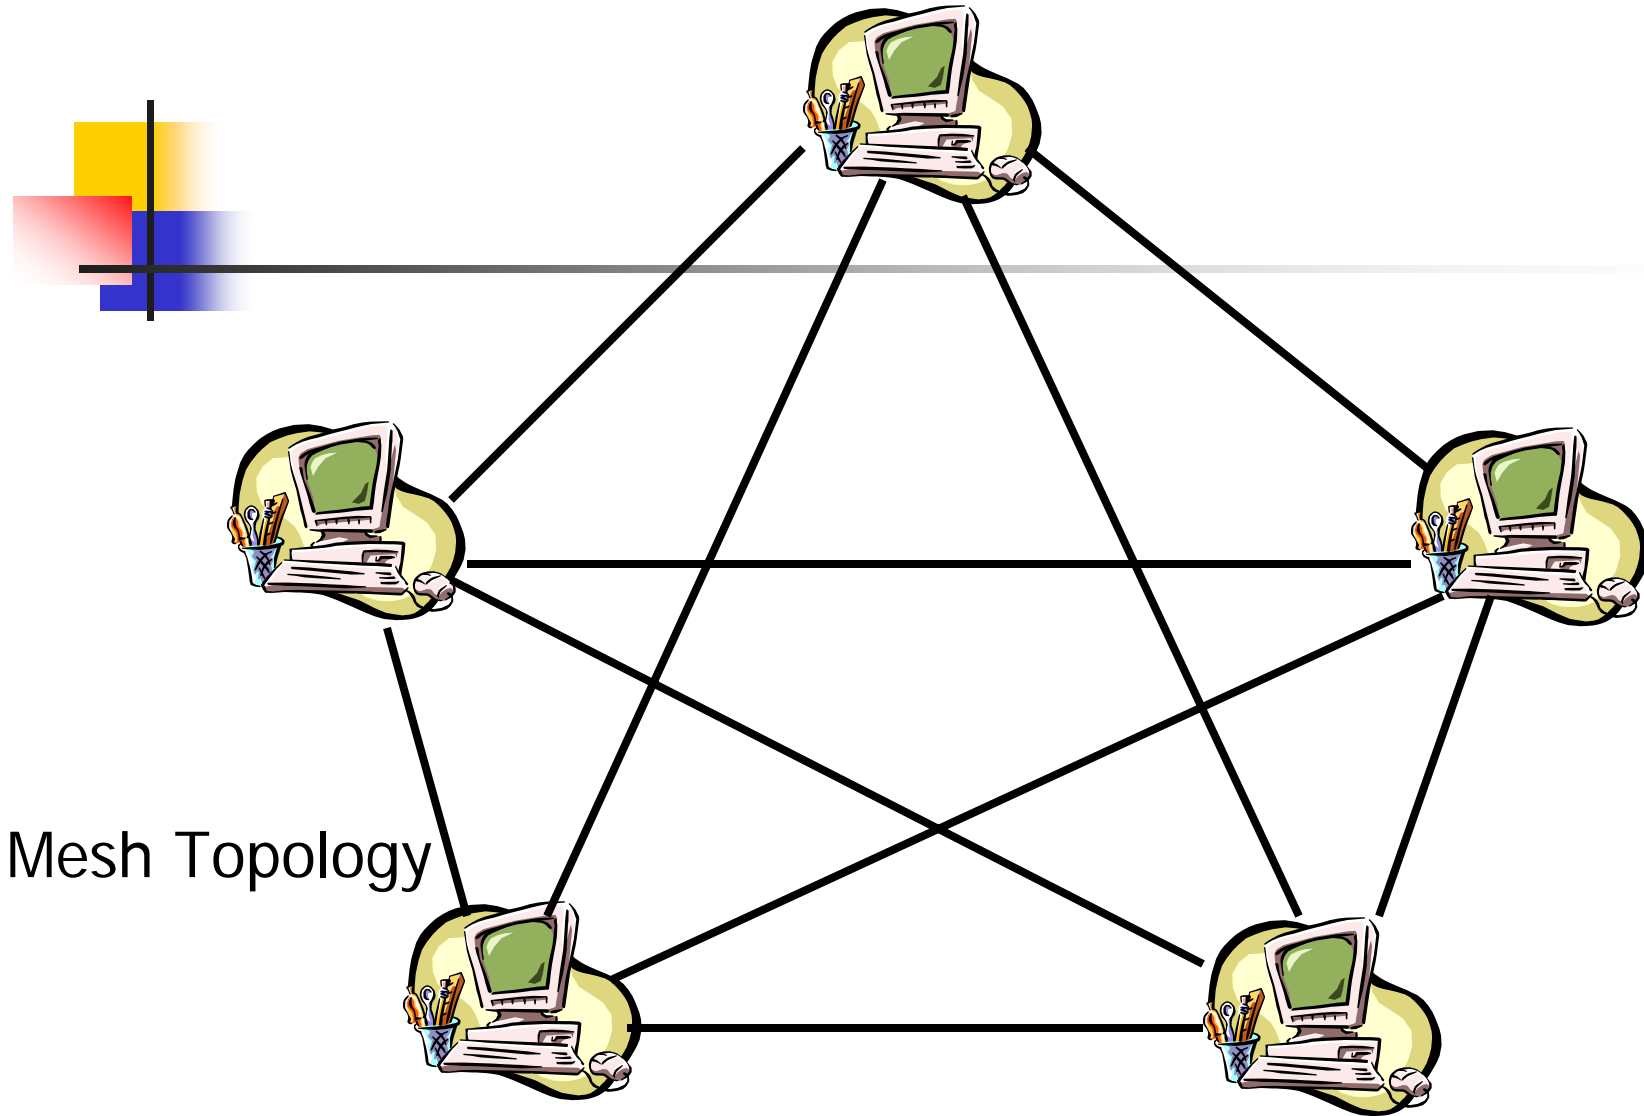

Mesh Topology


Mesh Topology – features

- 
- Has point to point connection between every device in the network
 - Excessive bandwidth is wasted for node to node signaling
 - Easy to isolate faults, troubleshoot etc
 - Extremely fault tolerant
 - Difficult to install and reconfigure

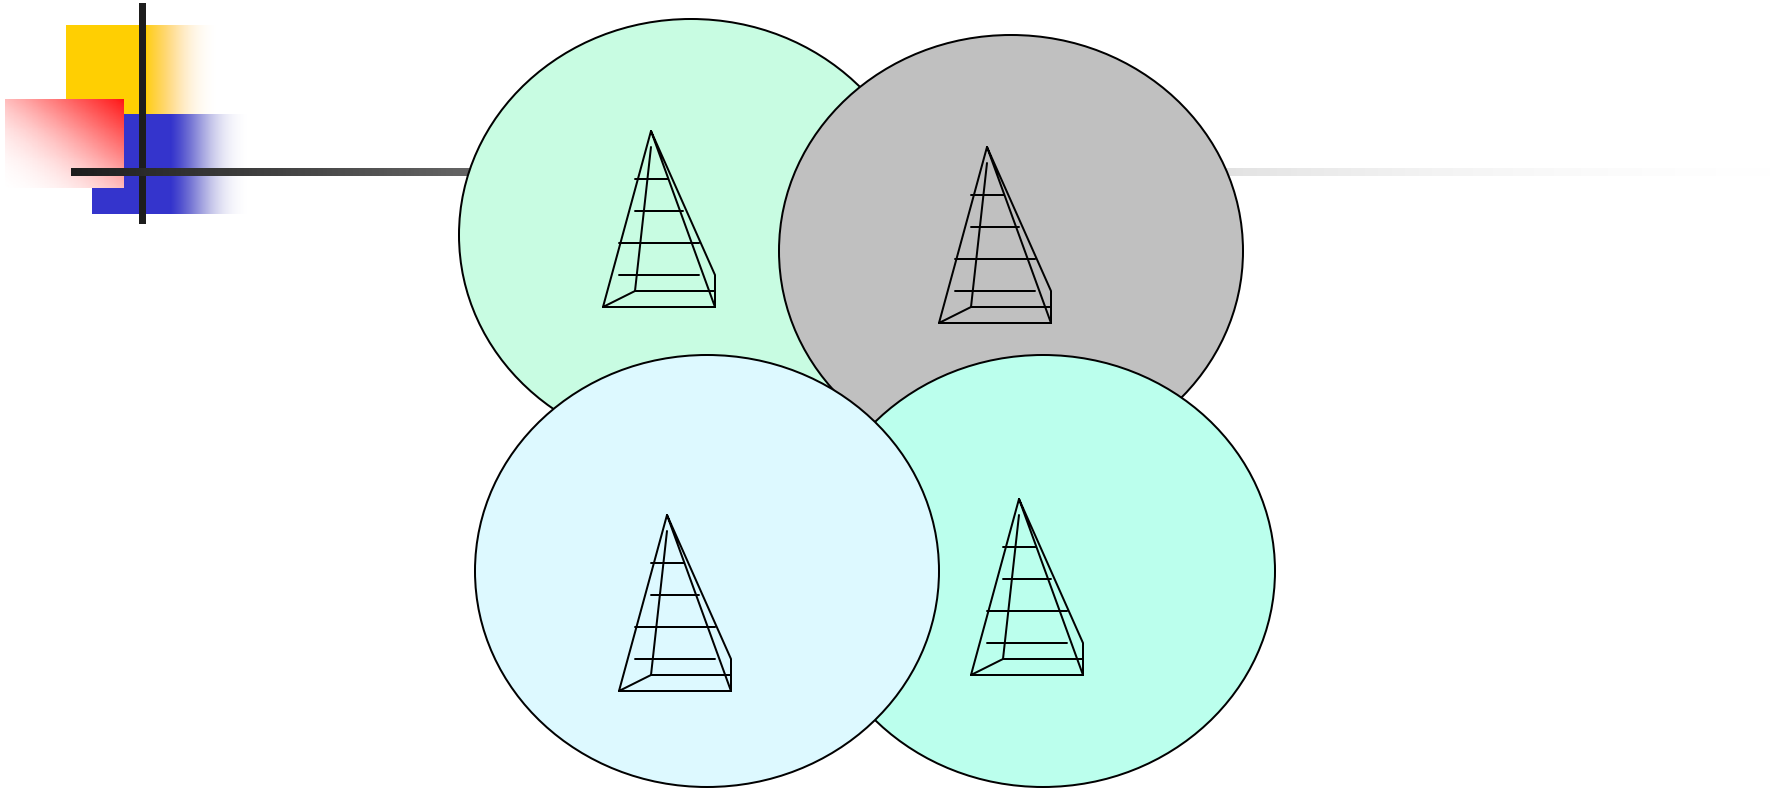

Cellular Topology

Cellular Topology


- 
- Combines wireless point to point and multipoint strategies
 - Divides a geographic area into cells
 - Devices within a cell communicates with a central station or hub
 - Devices can roam from cell to cell while maintaining connection
 - Easy to install, troubleshoot
 - No need of media reconfiguration when adding or moving users



Broadband Systems

- Uses the media's capacity for a single channel
- Multiple channels are created using a process called Frequency Division Multiplexing

Multiplexing

- 
- Allows multiple devices to communicate simultaneously over a single transmission media
 - Equipment used for this purpose is called Multiplexer or mux
 - 3 common methods used in mux
 - Frequency Division Multiplexing (FDM)
 - Time Division Multiplexing (TDM)
 - Statistical Time Division Multiplexing (Stat TDM)

Frequency Division


Multiplexing (FDM)

- Uses separate frequencies to establish multiple channels within a broadband medium
- Special carrier signals are created by mux and data signals are added to it during transmission and are removed at receiving end



Time Division Multiplexing (TDM)

- Divides a single channel into short-time slots
- Time slots are of the same length and same order – so also called Synchronous TDM



Statistical Time Division Multiplexing (Stat TDM)

- Dynamically allocates timeslots to active devices in priority basis
- Overcomes the wastage due to unused timeslots



MAC Address

- These are unique hardware addresses typically assigned by hardware vendors
- The format used depends on the media access method used so it is called MAC address
- All devices in the network, like bridges require this address to transmit packets